


Panel mounted receptacle with TwinCONTACT - Part no. 1171



- screwless spring terminals
- standard flange dimensions
- suitable for through wiring
- 20° inclination
- receptacles optional fitted with auxiliary contact

Technical information

| | |
|-----------------------|-------------------------|
| Ampere | 16 A |
| Poles | 4 p |
| Voltage | 500V |
| Earth position | 7 h |
| Hertz | 50-60 Hz |
| Connection technology | Screwless - TwinCONTACT |
| Contact | standard |
| Protection type | IP 67 |

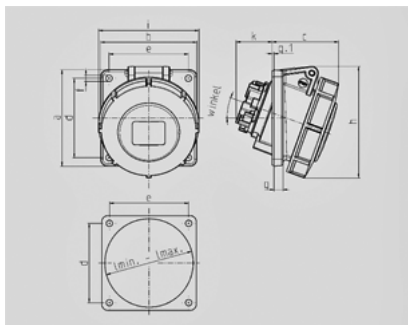

| Drawing 1 MB 520 | Amp. Poles | 16 | | | 32 | | |
|---|---------------|-----|-----|-----|-----|-----|-----|
| | | 3 | 4 | 5 | 3 | 4 | 5 |
| Dim. in mm | a | 85 | 85 | 85 | 85 | 85 | 85 |
| | b | 85 | 85 | 85 | 85 | 85 | 85 |
| | c | 56 | 59 | 59 | 64 | 64 | 71 |
| | d | 70 | 70 | 70 | 70 | 70 | 70 |
| | e | 70 | 70 | 70 | 70 | 70 | 70 |
| | f | 5.5 | 5.5 | 5.5 | 5.5 | 5.5 | 5.5 |
| | g | 8 | 8 | 8 | 8 | 8 | 8 |
| | g.1 | 2 | 2 | 2 | 2 | 2 | 2 |
| | h | 87 | 91 | 99 | 103 | 103 | 110 |
| | i | 78 | 85 | 89 | 103 | 103 | 106 |
| | k | 32 | 32 | 33 | 44 | 44 | 49 |
| | l min. | 57 | 64 | 70 | 78 | 78 | 78 |
| | l max. | 76 | 76 | 76 | 78 | 78 | 78 |
| Terminal for cond. cross section (mm²) min.-max. | | 1.5 | 1.5 | 1.5 | 2.5 | 2.5 | 2.5 |
| | | —4 | —4 | —4 | —6 | —6 | —6 |